



Cert. No. LRQ 0963008

ISO 9001

spirax/sarco

TI-P068-17

ST Issue 5

TD32F

Flanged

Thermodynamic Steam Trap

Description

The **TD32F** is a maintainable medium pressure flanged thermodynamic steam trap which has an integral strainer screen fitted to protect the internals from dirt.

The **TD32FLC** is designed specifically for low load applications such as steam mains drainage applications.

The **TD32FA** and **TD32FALC** are fitted with an anti-air-binding disc to ensure prompt removal of air on start-up.

Standards

This product fully complies with the requirements of the European Pressure Equipment Directive 97/23/EC.

Certification

This product is available with certification to EN 10204 3.1.

Note: All certification / inspection requirements must be stated at the time of order placement.

Sizes and pipe connections


DN15, DN15LC, DN20, DN20LC, DN25 and DN25LC

Flanged ASME (ANSI) B 16.5 Class 150 and 300, DIN 2501 PN40 and JIS/KS 10, 16 and 20.

Optional extras

Insulating cover (for the DN15 and DN20 only): To prevent the trap being unduly influenced by excessive heat loss such as when subjected to low outside temperatures, wind, rain etc.

Pressure / temperature limits

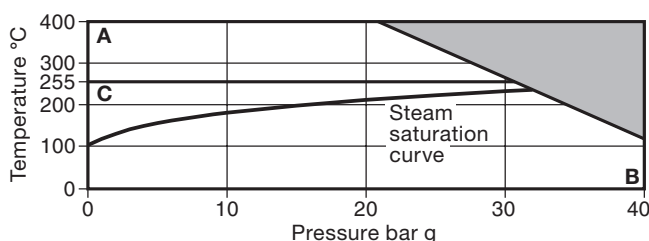


The product **must not** be used in this region.

A - B TD32F and TD32FLC


C - B TD32FA and TD32FALC

Body design conditions		PN40
PMA	Maximum allowable pressure	40 bar g
TMA	Maximum allowable temperature	400°C
Minimum allowable temperature		0°C
PMO	Maximum operating pressure for saturated steam service	32 bar g
TMO	Maximum operating temperature	TD32F and TD32FLC 400°C
		TD32FA and TD32FALC 255°C
Minimum operating temperature		0°C
Minimum operating pressure for satisfactory operation is 0.25 bar g		
PMOB	Maximum operating backpressure is 80% of upstream pressure	
Designed for a maximum cold hydraulic test pressure of 60 bar g		


The TD32FLC and TD32FALC versions are identified by the groove in the cap



The TD32FA and TD32FALC have an anti-air-binding disc



A TD32F is shown below

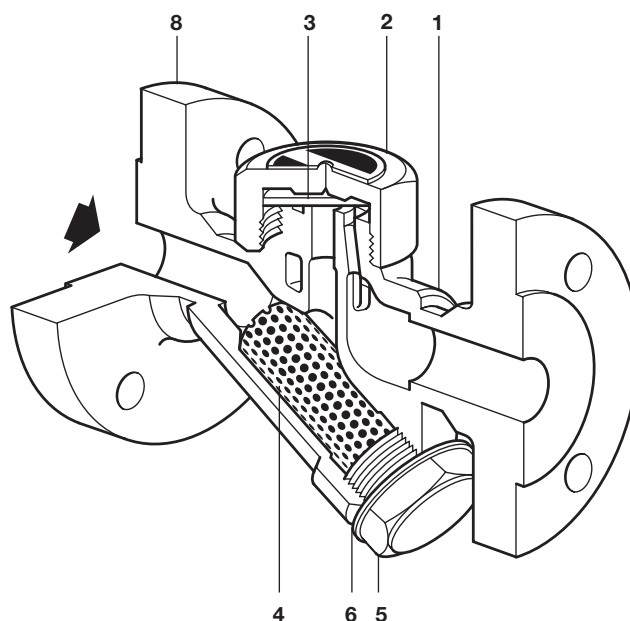


Materials


No.	Part	Material
1	Body	Stainless steel ASTM A743 CA-40
2	Cap	Stainless steel AISI 416
3	Disc	Stainless steel BS 1449 420 S45
4	Strainer screen	Stainless steel ASTM A240 316L
Note: The TD32FA and TDFALC are fitted with a 100 mesh stainless steel screen. All other versions have a 0.8 mm perforated screen.		
5	Strainer cap	Stainless steel AISI 416
6	Strainer cap gasket	Stainless steel BS 1449 304 S16
7	Insulating cover (optional extra for the DN15 and DN20 only)	Aluminium
8	Flanges	Steel DIN 17243 C22.8 Ws 1.0460

Dimensions/weights (approximate) in mm and kg

Size	A	B	C	D	E	F	G	H	Weight
DN15 and DN15LC	150	55	41	40	80	57	38	55	2.4
DN20 and DN20LC	150	60	47	40	95	57	38	61	3.1
DN25 and DN25LC	160	65	53	40	100	—	—	—	4.2

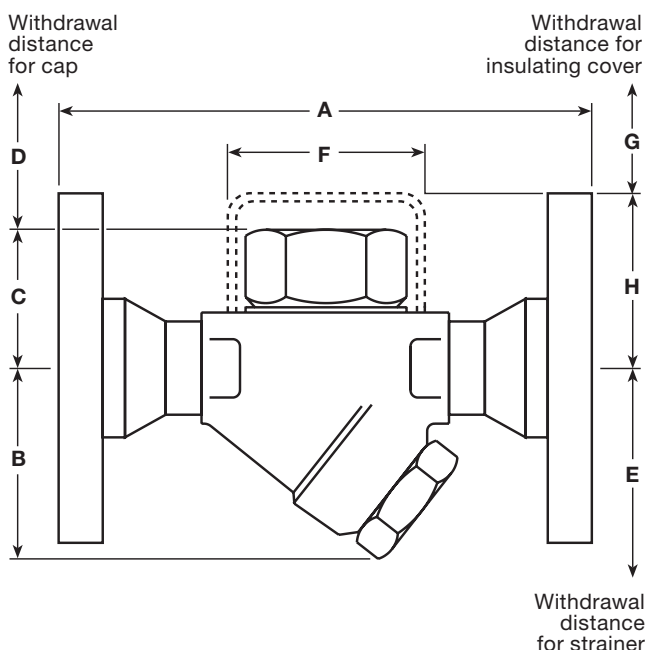

Capacities

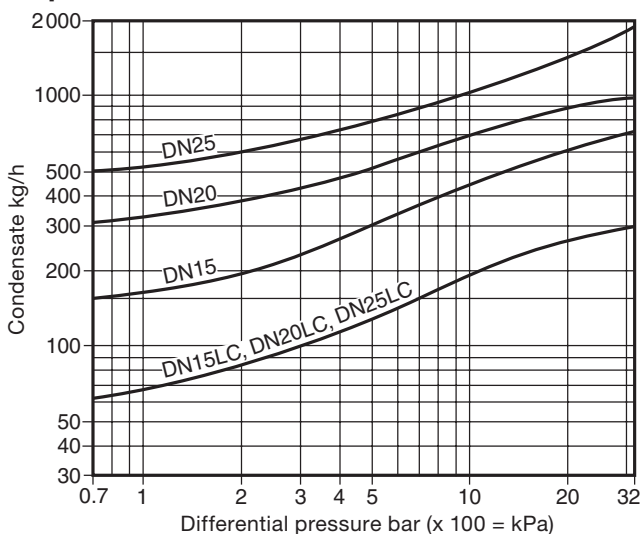

Safety information, installation and maintenance

For full details see the Installation and Maintenance Instructions (IM-P068-26) supplied with the product.

Installation note:

The TD32F is designed for installation with the capsule in a horizontal plane with the cover at the top. It is recommended that a non-return valve is fitted when discharging condensate into return lines where backpressure is experienced. It is also recommended that a diffuser is fitted when discharging to atmosphere. For ease and maintenance, consideration should be given to fitting isolation valves upstream and downstream of the steam trap.

Disposal

The product is recyclable. No ecological hazard is anticipated with the disposal of this product, providing due care is taken.

How to order

Example: 1 off DN15 Spirax Sarco TD32FALC low capacity steam trap with flanged PN40 connections and having an integral strainer screen and anti-air-binding disc fitted.

Spare parts

The spare parts available are shown in heavy outline. Parts drawn in broken line are not supplied as spares.


Available spares

Disc for TD32F or TD32FLC (packet of 3)	3
Disc, strainer screen and gasket for TD32FA or TD32FALC	3, 4, 6
Strainer screen and gasket	4, 6
Strainer cap gasket (packet of 3)	6
Insulating cover (for the DN15 and DN20 only)	7

How to order spares

Always order spares by using the description given in the column headed 'Available spares' and state the size and type of trap.

Example: 1 - Strainer screen for a DN15 Spirax Sarco TD32F thermodynamic steam trap.

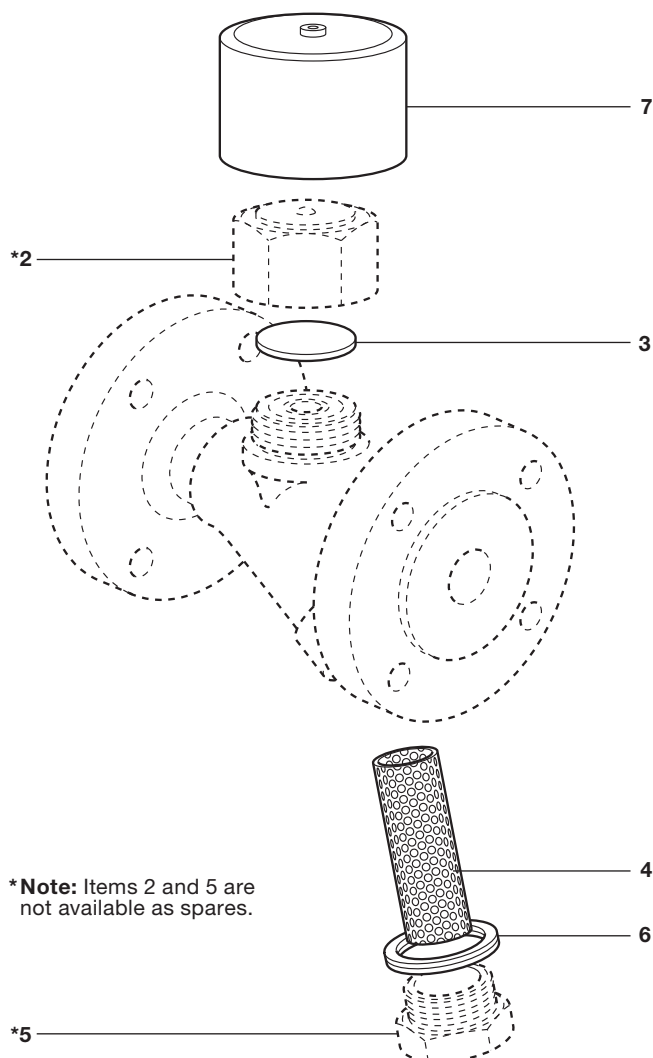

***Note:** Items 2 and 5 are not available as spares.

Recommended tightening torques

Item	Size	or mm	N m
2	DN15LC, 20LC, 25LC	36 A/F	135 - 150
	DN15	41 A/F	180 - 200
	DN20	41 A/F	180 - 200
	DN25	55 A/F	250 - 275
5	32 A/F		170 - 190